Board to Board ▶

pitch 1.00x1.45mm (0.039"x0.057") | Male | S.M.T. R/A

GBCC204 Series

Specifications

Current Rating :	1.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	300V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40˚C to +105˚C

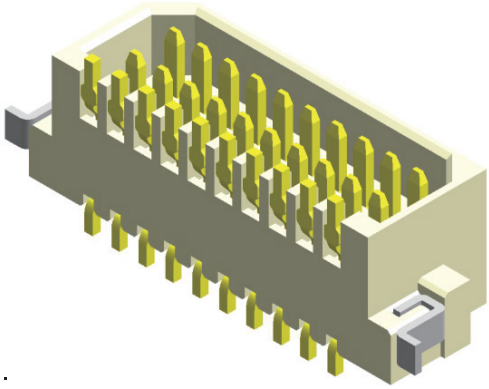

Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.

Mating with

B04



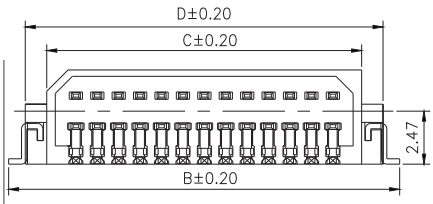

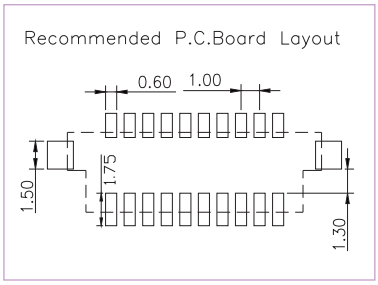

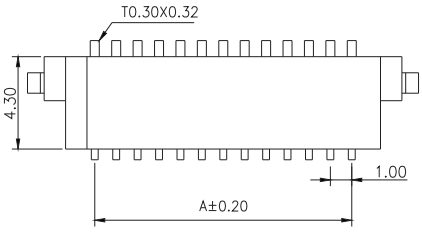



* For Coded Dimension Not Inside The Table, Please Refer To"Ordering Information"

No. of Pins/Row	Dimension Information			
	A	B	C	D
05	4.00	10.25	6.70	8.70
06	5.00	11.25	7.70	9.70
07	6.00	12.25	8.70	10.70
08	7.00	13.25	9.70	11.70
09	8.00	14.25	10.70	12.70
10	9.00	15.25	11.70	13.70

No. of Pins/Row	Dimension Information			
	A	B	C	D
11	10.00	16.25	12.70	14.70
12	11.00	17.25	13.70	15.70
13	12.00	18.25	14.70	16.70
14	13.00	19.25	15.70	17.70
15	14.00	20.25	16.70	18.70

Ordering Information

GBCC2 [XX] - XX [XX]

Height Option (H) Standard
[04]

No. of Pins per Row
[05] ~ [15]

Standard Plating
[02] : Gold Flash

Selective Plating
[01] : Tin

Stardand Packaging : Tube

A001REAC